




TECHNICAL INFORMATION \_ CAT. N. YACT HNKE 0##0 X0000

## 90° EXTENDED HAND KNOB 300mm STRAIGHT VERSION

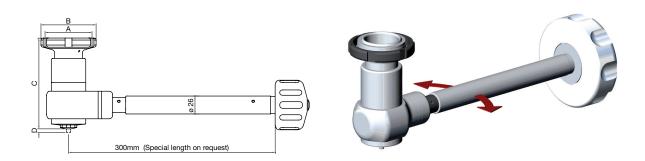

Clean and Aseptic Valves of CAD Product Line have simple and safe design, with their full drainability, without asymptotic seal and dead leg, are offering fast cleanability and sterilization practices. They are designed to fulfil stringent demands of CIP-SIP and Production Cycles on Aseptic Processing.

HNKE - 90° Extended Hand Knob is designed to control the CAD Clean and Aseptic Valves on SAFE areas for all application where a more comfortable or safe management is required, such as on CAD Bottom Tank Valves. It has few and simple moveable parts which results in a very reliable component and low maintenance cost. Standard extension of 300 mm but special lengths available on request. Rotating system as standard for an easier assembling and ready to be connected to the CAD Double Position Sensor (H060: YACT-SEND-0XX0-X0000).

CODE	A	<b>B</b> mm (inch)	<b>C</b> mm (inch)	<b>D</b> mm (inch)	SIZE
YACT-HNKE- <b>0250</b> -X0000	M70x1	80,00 (3,15)	126,00 (4,96)	5,50 (0,22)	A25
YACT-HNKE- <b>0380</b> -X0000	M80x1	99,00 (3,90)	151,00 (5,95)	8,50 (0,34)	A38
YACT-HNKE- <b>0500</b> -X0000	M103x1,5	119,00 (4,69)	165,50 (6,52)	11,00 (0,43)	A50





SPECIFICATION:											
CAD SIZE		A25	A38	A50							
MATERIAL	body	1.4404	1.4404	1.4404							
	locking ring	1.4404	1.4404	1.4404							
	hand knob	PTFE	PTFE	PTFE							
DESIGN PRESSURE	max(1) bar(g)	6	6	6							
	max psi(g)	87	87	87							
	min bar(g)	-1	-1	-1							
	min psi(g)	-14	-14	-14							

**Environment Temperature:** are autoclavable 135° C

**Application Areas:** SAFE

**Note:** The applied valve body and diaphragm may have different design temperature

and/or pressure limits. The weakest component determines the maximum

design temperature and pressure limits, when they are assembled.

**Surface Roughness:** External surface Ra ≤ 0.8µm (32µinch)

**Lubricant:** Actuator are lubricated to workshop and don't need lubrication

Labeling: Each Actuator is labeled for full LOT traceability

**Packaging:** The Actuator is packaged in a closed box with Operating and Maintenance

bulletin, Certificate of Conformity and Materials Certification 3.1

**Quality Control:** Quality Assurance System guarantees the control and traceability of the product.

**Options:** For non-standard Actuator Options or special length, please contact us

for further information.

Orders and Information: For additional information or to place a order call your nearest

Distributor or visit www.rattiinox.com